



XG3369RT

MOBILE ELEVATING WORK PLATFORM

Comply with ANSI/CSA



XG3369RT

MOBILE ELEVATING WORK PLATFORM

FEATURES

MEASUREMENTS



12m(39'4") working height
Up to 455kg(1003 lbs)lift capacity
Up to 135kg(297.6 lbs)auxiliary platform lift capacity

PRODUCTIVITY

Folding guardrail
Platform self-locking door
Unidirectional extension platform
Non-slip metal platform
Boom safety access bracket
Standard transport forklift holes
Lanyard attachment points
Fixed and lifting points
Four-wheel drive
Front wheel steering
Action buzzer
Strobe lights
Electric horn
Emergency stop button
Fuel level indicator
Full proportional travel and lift control
High altitude automatic travel limiting protection
Outrigger levelling system
Hydraulic oil cooling system
Tilt protection system
Charging protection system
Automatic brake system
Fault diagnosis system
Emergency descent system
Levelling leg support detection system
Engine condition detection and start-up protection system
Weighing alarm system
Axle balancing system

OPTIONS

High Altitude Low Speed Walking

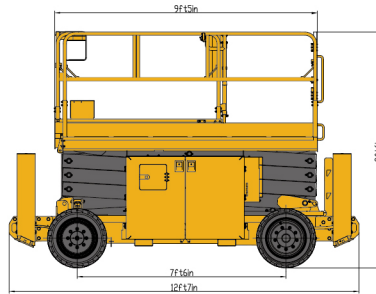

MAIN PARAMETER

Item		Metric	Imperial
Machine Dimensions	a.Length (without ladder)	3.835m	12ft 7in
	b.Width	1.76m	5ft 9in
	c.Height (Platform Folded)	2.58(1.83m)	8ft 6in(6ft 0in)
f.Wheel base		2.29m	7ft 6in
Wheel track		/	/
Minimum ground clearance (Pot hole protector – raised/lowered)		200mm	8in
Dimension of working platform	d.Length	2.88m	9 ft 5 in
	e.Width	1.52m	4ft 12in
	Height	1.255m	4ft 4in
	Extension length of auxiliary platform	1.43m	4ft 8in
Total weight of machine		4400kg	9700 lbs
Maximum height of platform		10m	32ft 10in
Minimum height of platform		1.43m	4ft 8in
Maximum working height		12m	39ft 4in
Maximum driving height		10m	32ft 10in
Minimum turning radius (inner wheel/outer wheel)		2.3m/4.8m	7ft 7in/15ft 9in
Work platform lift capacity		455kg	1003 lbs
Work platform lift capacity – platform extended		135kg	297.6 lbs
Work platform lift time		38s	38s
Work platform descend time		46s	46s
Maximum Drive Speed - Lowered		5km/h	3.10mph
Maximum Drive Speed -Elevated		0.4km/h	0.24mph
Maximum theoretical gradeability		40%	40%
Tilt warning angle (side, forward, and backward)		2°/3°	2°/3°
Engine	Model	D1105-E4B	D1105-E4B
	Rated power/speed	18.2kW/3000rpm	24.4hp/3000rpm
	Manufacturer	Kubota	Kubota
Tire models		660.4mm×304.8mm	26in×12in